


U字溝 ザラザラ細目 ゴム無



R1SU.R型 R1FU.R型

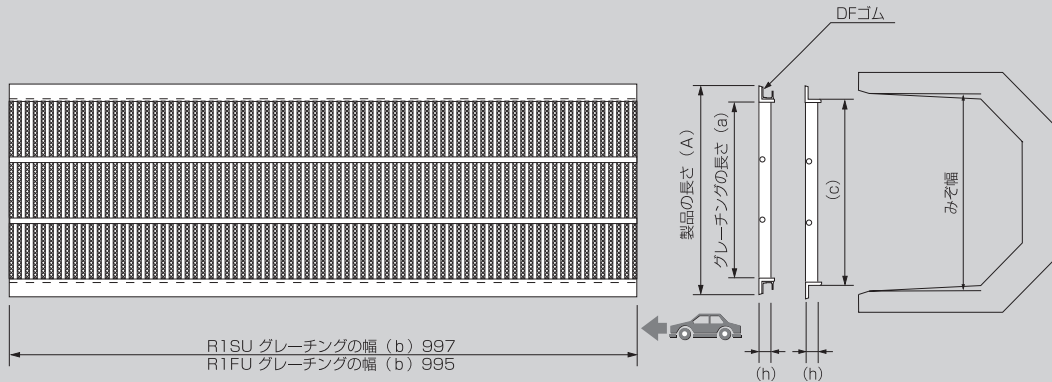


U字溝 細目タイプ ゴム無

溝幅	型式記号	寸法(mm)				重量
		エンド アングル	L寸法	製品寸法	GR寸法	
<b>T-14</b>						
150	R1SU25-15	L40×5	997	210	130	12.4
180	R1SU25-18	L40×5	997	240	160	13.9
200	R1SU25-20	L40×5	997	260	180	14.8
240	R1SU32-24	L40×5	997	300	220	19.7
300	R1SU32-30	L40×5	997	360	280	23.3
360	R1SU38-36	L40×5	997	420	340	31.0
450	R1FU44-45	L50×6	995	525	425	47.2
<b>T-6</b>						
150	R1SU19-15	L30×3	997	195	135	7.9
180	R1SU19-18	L30×3	997	225	165	9.0
200	R1SU25-20	L40×5	997	260	180	14.8
240	R1SU25-24	L40×5	997	300	220	16.7
300	R1SU32-30	L40×5	997	360	280	23.3
360	R1SU38-36	L40×5	997	420	340	31.0
450	R1FU38-45	L40×5	995	510	430	39.7
<b>T-2</b>						
150	R1SU19-15	L30×3	997	195	135	7.9
180	R1SU19-18	L30×3	997	225	165	9.0
200	R1SU19-20	L30×3	997	245	185	9.7
240	R1SU19-24	L30×3	997	285	225	11.2
300	R1SU25-30	L40×5	997	360	280	19.6
360	R1SU25-36	L40×5	997	420	340	22.6
450	R1SU32-45	L40×5	997	510	430	32.8
<b>5. 0kN/m<sup>2</sup></b>						
150	R1SU19-15	L30×3	997	195	135	7.9
180	R1SU19-18	L30×3	997	225	165	9.0
200	R1SU19-20	L30×3	997	245	185	9.7
240	R1SU19-24	L30×3	997	285	225	11.2
300	R1SU19-30	L30×3	997	345	285	13.3
360	R1SU19-36	L30×3	997	405	345	15.7
450	R1SU19-45	L30×3	997	495	435	19.1

# U字溝 ザラザラ細目 ゴム付



## R1SU.R型 R1FU.R型

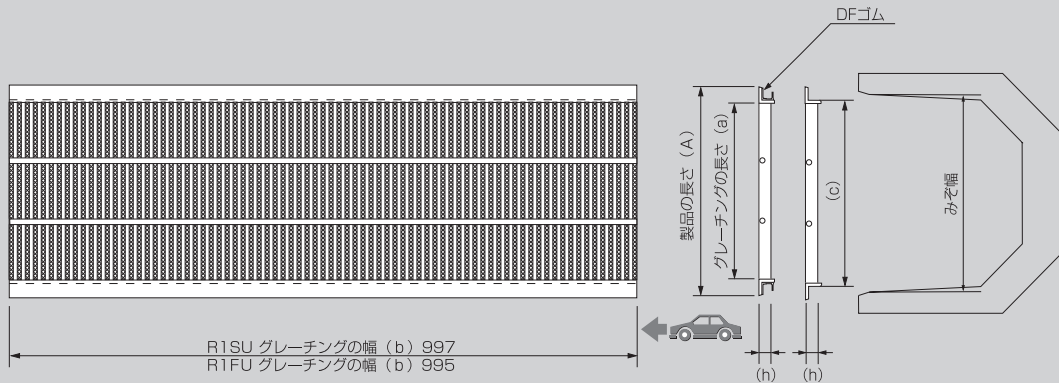

## U字溝 細目タイプ ゴム付

溝幅	型式記号	エンド		寸法(mm)			重量
		L40×5	角度	L寸法	製品寸法	GR寸法	
<b>T-14</b>							
150	R1SU25R15	L40×5		997	190	110	12.1
180	R1SU25R18	L40×5		997	220	140	13.5
200	R1SU25R20	L40×5		997	240	160	14.5
240	R1SU32R24	L40×5		997	280	200	19
300	R1SU32R30	L40×5		997	340	260	22.7
360	R1SU38R36	L40×5		997	400	320	30.1
450	R1FU44R45	L50×6		995	510	410	46.5
<b>T-6</b>							
150	R1SU19R15	L40×5		997	190	110	10.8
180	R1SU19R18	L40×5		997	220	140	11.9
200	R1SU25R20	L40×5		997	240	160	14.5
240	R1SU25R24	L40×5		997	280	200	16.4
300	R1SU32R30	L40×5		997	340	260	22.7
360	R1SU38R36	L40×5		997	400	320	30.1
450	R1FU38R45	L40×5		995	490	410	38.8
<b>T-2</b>							
150	R1SU19R15	L40×5		997	190	110	10.8
180	R1SU19R18	L40×5		997	220	140	11.9
200	R1SU19R20	L40×5		997	240	160	12.6
240	R1SU19R24	L40×5		997	280	200	14.1
300	R1SU25R30	L40×5		997	340	260	19.2
360	R1SU25R36	L40×5		997	400	320	22.2
450	R1SU32R45	L40×5		997	490	410	32.1
<b>5.0kN/m<sup>2</sup></b>							
150	R1SU19R15	L40×5		997	190	110	10.8
180	R1SU19R18	L40×5		997	220	140	11.9
200	R1SU19R20	L40×5		997	240	160	12.6
240	R1SU19R24	L40×5		997	280	200	14.1
300	R1SU19R30	L40×5		997	340	260	16.2
360	R1SU19R36	L40×5		997	400	320	18.6
450	R1SU19R45	L40×5		997	490	410	22